


Description	Material	Finish
Body	Brass	Nickel
Pin	Brass	Gold
Insulation	PTFE	N/A
Crimp Ring	Brass	Nickel
Cover	Brass	Nickel

	REVISIONS				
REV	DESCRIPTION	DATE	APPV		
В	Added New Title Block	12-JUL-12	SAH		


## SIDE VIEW



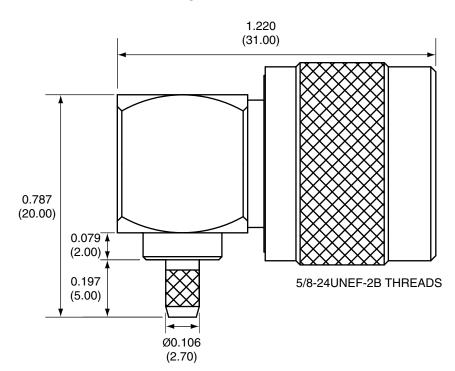



## RECOMMENDED CABLE STRIPPING DIMENSIONS



NOTES: (UNLESS OTHERWISE SPECIFIED)

- 1. ALL DIMENSIONS ARE IN INCHES [mm]. 3. MANUFACTURE TO BE COMPLIANT WITH EU ROHS DIRECTIVE.
- 2. DIMENSIONS APPLY AFTER FINISHING. 4. SAFETY BREAK ALL SHARP CORNERS AND EDGES .02 MAXIMUM.

TITLE:

WARNING: THIS DRAWING CONTAINS PROPRIETARY INFORMATION THAT IS THE SOLE PROPERTY OF LINX TECHNOLOGIES, AND SHALL BE TREATED AS SUCH. NO DISCLOSURE OR REPRODUCTION OF THIS DOCUMENT IS PERMITTED, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF LINX TECHNOLOGIES OR ITS

DESIGNATED AGENTS.

MATERIAL:

TOLERANCES:
.020 [0.50] -200 [5.00] = ±.008 [0.20]
.200 [5.00] -4.75 [120.0] = ±.024 [0.60]
4.75 [120.0] -12.40 [315.0] = ±.040 [1.0]

ANGLES: ±1°

ANGLES:

**ENGR: S.HOGAN** 

Linx

159 ORT LANE MERLIN, OR 97532

N MALE RIGHT ANGLE CABLE END CRIMP FOR RG174 CABLE

| DT: 12-JUL-12 | SCALE: 2:1 | DO NOT SCALE DRAWING | SHEET 1 OF 1